


## Type 00

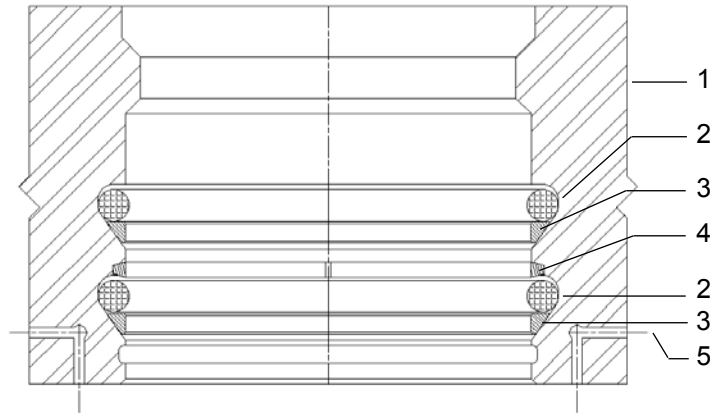

### Type 00 Secondary Seal Parts List

1	Housing/Head
2	Seal
3	Anti-extrusion Ring
4	Backup Ring
5	Test Port

The Crown Type 00 Secondary Seal is an interference-energized seal assembly consisting of a custom-built o-ring, anti-extrusion ring and backup ring. The “OO” profile can be included in any tubing head, casing head or packoff flange.

The seals retain pressure from either side. The interference in the seal between the casing and the groove generates the

seal. The o-ring inner diameter shall have a minimum interference of 0.031 inches against minimum casing diameter as per API 5CT casing tolerances of +1% and -0.5%.

The bit guide is designed as part of the housing to guide the drill bit through the housing when the bit is lowered through it. The inside shoulder protects the upper edge of the casing.